

Frequency Up Converter 70MHz to S Band



M O D E L
U P S B 7 0 - D T A 1 K

DESCRIPTION

The DTA S.A. Upconverter 70 MHz to S-Band, DWSB70-DTA1K model, combines the state-of-art of the communications converters, giving great flexibility to the operator.

The Upconverter move the frequency band of de IF input signal to de RF output frequency band. The phase noise, amplitude flatness, group delay and spourius output have been considered to achieve an optimal frequency conversion for SATCOM ground station systems.

FEATURES

- Low Phase Noise.
- Synthesized Frequency Local Oscillators With 100 KHz Step.
- Optional High Stability Reference Oscillator.
- Automatic switching to external 10 MHz Reference
- High Linearity RF Chain for High Dynamic Range.
- 30dB level control
- Low Component Count for Optimum MTBF.
- Remote Control Capabilities Through TCP/IP Protocol (Ethernet Interfase) With Web Server Page or RS232 Serial Interface
- Local Control Panel With Bright LCD Display.
- Interface to Redundance Switchover system
- Wide Temperature Operating Range 0 to 50°C.
- One Rack Unit Height for 19" Rack Mounting.
- Low Power Dissipation.
- Universal, autoranging ac input (100–240 Vac)
- Microprocessor-based control logic that allows firmware upgrades in the field via the Ethernet or serial interface, and automatic restore last configuration on case of external power failure

All specifications are subject to change without notice.



SPECIFICATIONS

Output spectrum	Dual conversión, non inverted
Frequency step size	100kHz
Input Frequency	70 MHz $\pm$ 20 MHz
Input Impedance :	50 Ohms
Input Return Loss :	20 dB min
Input LO leakage	-80dBm
Input level (non damage) :	0dBm
Output Frequency :	2000-2300 MHz
Output Impedance :	50 Ohms
Output Return Loss	20 dB min
Power Output (P1dB)	+10 dBm
Third order intermodulation distortion	60 dBc with two signals @ -20dBm output
Gain :	30dB
Gain adjustment range :	30 dB
Gain step :	0.5 dB
Gain Flatness	± 0.5 dB
Gain Slope	0.05dB/MHz max
Spurious Output	
Signal related	-60dBc
Signal Independent	-80dBm
Noise Figure :	10 dB
Image Rejection :	80 dB

Group Delay (70MHz $\pm$ 18MHz)	
Lineal:	0.05 ns/MHz
Ripple	2 ns p-p
Internal Reference	
Frequency:	10 MHz
Stability	$\pm 5E-9$, 0 a 50 °C;
Aging:	1E-9/día max.
Phase Noise:	

100 Hz	-67 dBc/Hz
1 kHz	-87 dBc/Hz
10 kHz	-97 dBc/Hz
100 kHz	-97 dBc/Hz
1 MHz	-117 dBc/Hz

GENERAL SPECIFICATIONS:

RF Input connector:	SMA Female
RF Output connector :	SMA Female
RS-232 connector:	DB9 Male
Ethernet connector:	RJ-45
Redundancy Switch connector	DB9 Female
Primary power:	100-240 VAC, 50-60 Hz

PHYSICAL:


Chasis:	1.75" x 19" x 11"
---------	-------------------

ENVIROMENTAL:

Operating ambient Temperature:	0 to 50°C
--------------------------------	-----------

All specifications are subject to change without notice.

BLOCK DIAGRAM

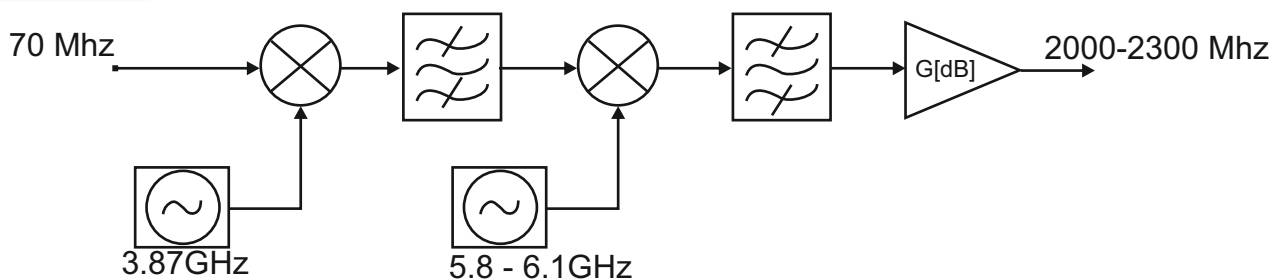

HEADQUARTERS

Monseñor P. Cabrera 5020 - Córdoba, X5008HJP Argentina
Tel.: (54) 351 4770044 / Fax (54) 351 4764576
sales@dta-sa.com

ISRAEL Office

Ultram Technologies Ltd.
58 Hameyasdim Street, Moshav Mazor, 73160
Tel.: (972) 03 9331696
sales@ultramtech.co.il

USA Office

GM Systems LLC
27 Kim Place, Kings Park, N.Y. 11754-5025
Tel.: 631-269-3820
terlizzi@gmsystems.com

for more information visit:
<http://www.dta-sa.com/>

